

Pigment Dispersions for Solvent-Based Alkyd Coatings

CHROMA-CHEM® 824 colorants are designed specifically for use in non-aqueous industrial and architectural coatings, including alkyds, wood stains and NC lacquers.

Key Benefits

The unique, long-oil alkyd vehicle provides excellent wetting properties. Each colorant contains a carefully selected blend of vehicle, solvent, pigment and additives to provide acceptance in a wide range of solvent based applications.

The pigments selected for these colorants provide a wide-range of hues, good durability, lightfastness and chemical resistance. The solvent-type is mineral spirits, which complies with specifications of Rule-66 and Regulation 3. Flash point TOC 106°F.

Applications

The CHROMA-CHEM® 824 colorants are formulated for use in solvent-based industrial coatings including, but not limited to, general industrial finishes, industrial maintenance, and wood coatings.

Properties

The CHROMA-CHEM® 824 colorants offer the coatings formulator a product line with a long history of excellent performance in alkyd and lacquer-based coatings. The line of colorants exhibits excellent pigment development and rheological characteristics that contribute extraordinary stability to the colorant (resistance to flocculation, settling, and syneresis).

The CHROMA-CHEM® 824 colorants are controlled to a tinting strength tolerance of $\pm 5\%$ by weight.

Compatibility

The CHROMA-CHEM® 824 colorants have been evaluated in a large number of solvent coating types, ranging from 5 to 15 percent loading. Performance properties tested include gloss retention, hardness, adhesion, effects of baking (heat), drying-times and resistance to acid, alkali, solvents and water, etc.

Results are consistent with the individual, typical pigment properties, and good results are expected in a wide variety of coatings applications based on alkyd, nitrocellulose and ethyl cellulose lacquers, and polyurethane systems. It is recommended that testing under both actual and accelerated conditions occurs to determine suitability for the desired application.


Shelf Life

Proper handling is essential to maintain good quality. It is recommended that the colorants be mixed prior to use. Containers should be tightly sealed when not in use. Repacking the colorant into a smaller container should be considered if the colorant level in the container is less than 20% of the original amount and will be stored for an extended period of time.

Shelf life on the CHROMA-CHEM® 824 colorants is 3 years for most colorants and 2 years for white and oxide pigment colorants from the date of manufacture in unopened containers.



WOOD COATINGS

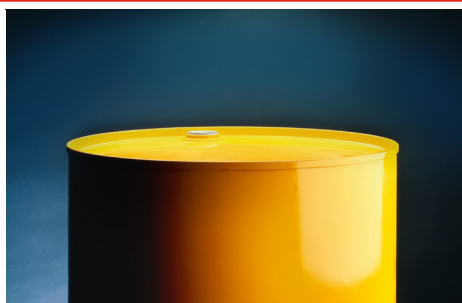

GENERAL INDUSTRIAL FINISHES



INDUSTRIAL MAINTENANCE

CHROMA-CHEM® 824 TECHNICAL DATA

Product Code	Description	CI Name	%Pigment		%Non-Volatiles		%Volatiles		Specific Gravity	VOC g/L	Pigment Lightfastness		Pigment Resistance	
			X Wt.	X Vol.	X Wt.	X Vol.	X Wt.	X Vol.			Mass	Tint	Acid	Alkali
824-0082	Titanium White	White 6	67.5	33.0	22.0	41.4	10.5	25.6	1.87	197	N	N	N	N
824-0419	Lithol Rubine	Red 57:1	22.0	15.0	46.9	45.7	31.2	39.3	1.01	316	A	A	A	A
824-0440	Barium Lithol Rubine	Red 57:1	25.0	15.7	40.0	39.5	35.0	44.8	1.05	368	A	A	A	A
824-0705	Toluidine Red	Red 3	43.5	32.5	32.4	34.5	24.1	33.1	1.07	258	N	A	N	N
824-0709	Toluidine Red LT	Red 3	23.6	17.4	56.3	56.6	20.1	26.0	1.03	207	N	A	N	N
824-0924	Dinitro Orange	Orange 5	44.0	32.6	29.5	31.2	26.5	36.2	1.10	291	S	A	N	N
824-1006	Light Red Oxide	Red 101	67.0	26.0	18.3	36.2	14.8	37.8	1.86	274	N	N	N	N
824-1012	Medium Red Oxide	Red 101	55.8	18.8	31.1	52.6	13.1	28.7	1.81	237	N	N	N	N
824-1013	Venetian Red	Red 101	64.0	29.3	18.9	32.5	17.2	38.3	1.73	296	N	N	N	N
824-1018	Trans Red Oxide	Red 101	20.0	4.3	58.0	64.2	22.0	31.5	1.15	252	N	N	N	N
824-1106	Burnt Sienna	Brown 7	50.0	22.8	35.5	50.6	14.5	26.7	1.59	230	N	N	N	N
824-1302	Burnt Umber	Brown 7	59.8	28.1	24.0	38.9	16.2	33.0	1.66	270	N	N	N	N
824-1315	Burnt Umber	Brown 7	49.5	22.3	25.9	34.8	24.6	42.9	1.40	345	N	N	N	A
824-1615	Van Dyke Brown-Synthetic	Brown 7	40.4	17.0	39.0	49.3	20.6	33.7	1.26	260	N	N	N	N
824-1801	Yellow Oxide	Yellow 42	60.0	24.5	21.6	35.9	18.4	39.6	1.70	312	N	N	N	N
824-1803	Raw Sienna	Yellow 43	58.0	24.1	25.7	41.6	16.4	34.3	1.56	255	N	N	N	N
824-1804	Yellow Oxide LT	Yellow 42	60.0	24.5	21.6	35.9	18.4	39.6	1.67	308	N	N	N	N
824-1818	Trans Yellow Oxide	Yellow 42	28.0	8.0	46.7	54.1	25.3	37.9	1.20	304	N	N	N	N
824-2003	Raw Umber	Brown 7	53.0	24.3	27.2	39.0	19.8	36.7	1.41	279	N	N	N	N
824-2007	LF Medium Yellow	Yellow 74/65	34.8	21.7	38.1	40.8	27.1	37.5	1.12	302	N	A	N	N
824-2511	LF Light Yellow	Yellow 74	35.0	20.7	40.0	43.8	25.0	35.5	1.12	281	N	A	N	N
824-5503	Phthalo Green	Green 7	21.8	10.5	53.0	55.4	25.2	34.1	1.06	268	N	N	N	N
824-7209	Phthalo Blue	Blue 15	17.5	11.0	58.0	57.6	24.5	31.5	1.04	256	N	N	N	N
824-7211	Phthalo Blue	Blue 15	25.0	16.1	50.0	50.9	25.0	33.0	1.06	264	N	N	N	N
824-9923	Carbon Black	Black 7	16.5	8.9	44.6	42.8	38.9	48.3	1.00	390	N	N	N	N
824-9946	Lamp Black	Black 7	34.7	18.0	23.8	25.2	41.5	56.8	1.10	458	N	N	N	N
824-9969	Raven Black	Black 7	31.1	18.2	35.5	36.9	33.4	44.9	1.07	357	N	N	N	N
824-9976	Carbon Black	Black 7	19.5	11.2	57.7	58.8	22.8	30.1	1.06	241	N	N	N	N

Lightfastness and Resistance Key			
N	no bleed / discoloration	*	no Florida data, only Fadeometer
S	slight	**	no data
A	appreciable		
<i>Lightfastness and Resistance information is provided for guidance purposes only. Source: NPIRI Raw Materials Data Handbook Volume 4 (Copyright © 2000)</i>			

This information and all further technical advice is based on our present knowledge and experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. In particular, no warranty, whether express or implied, or guarantee of product properties in the legal sense is intended or implied. We reserve the right to make any changes according to technological progress or further developments. The customer is not released from the obligation to conduct careful inspection and testing of incoming goods. Performance of the product described herein should be verified by testing, which should be carried out only by qualified experts in the sole responsibility of a customer. Reference to trade names used by other companies is neither a recommendation, nor does it imply that similar products could not be used.

